



# VP160

## Palm Recognition & Fingerprint Reader for Time Attendance and Access Control

### Specification

#### Image Sensor

- BioID Sensor

#### Display

- 2.7 Inch TFT Color Screen

#### Palm Capacity

- 600(1:N)

#### Fingerprint Capacity

- 3000(1:N)

#### ID Card Capacity

- 10,000

#### Logs Capacity

- 100,000

#### Memory

- 128MB RAM/256MB Flash

#### Communication

- TCP/IP, USB-Host

#### Standard Functions

- "Automatic Status Switch, Self-Service Query, Work Code, T9 Input, 9 Digit User ID, DST, Scheduled Bell and SMS, Exit Button, Door Lock, Alarm, 12V OUT, AUX IN, Access Control"

#### Optional Functions

- MiFare Cards

#### Power Supply

- 12V/1.5A

#### Verification Speed

- less than 1S

#### Operating temperature

- 0-45 (Indoor)


#### Operating Humidity

- 20%-80%

#### Dimensions(L×H×D)

- 17.9 x 13.5 x 3.8 cm

### Advanced Features




### What is VP160

"VP160 is a multibiometric identification time & attendance and access control terminal, which can connect with third party electric lock, and exit button etc. With the latest palm/fingerprint identification algorithm and streamlined technology, it can hold 600 palm templates and up to 3,000 palm templates without dividing into groups. Communicating via TCP/IP, and USB host, it ensures a smooth connection and data transfer. Amazing verification speed and intuitive operation process make it popular. Elaborately designed and finely processed, it matches your slap-up office perfectly."


### Installation & Communication Diagram

\*TCP/IP (cat5e) or USB Thumb Drive (Selectable)  
\*for illustration only

#### Access Control

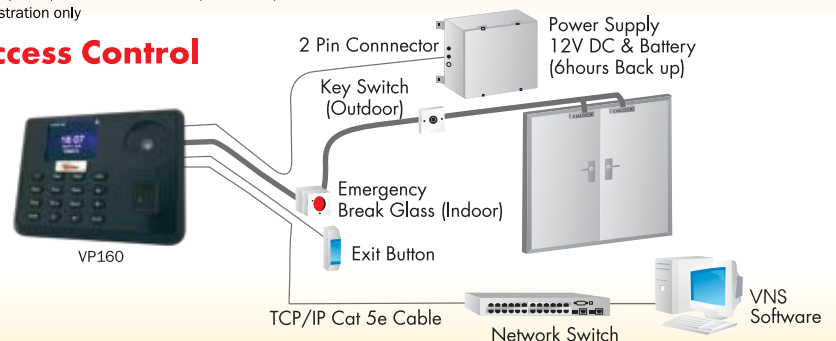

#### Time Attendance

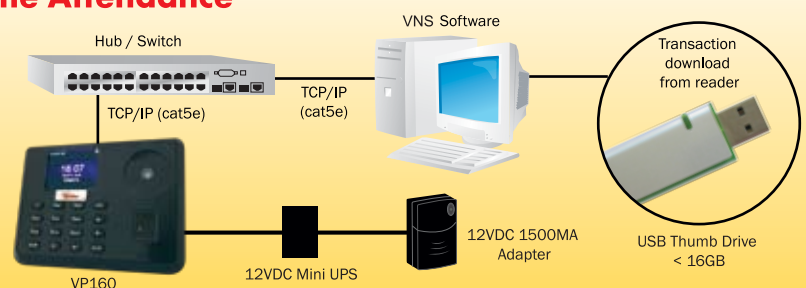

All product's informations / specifications are subject to change without prior notice.

© 2014-2019 Vigilance Security Sdn Bhd.  
All rights reserved.  
www.vigilance.com.my